



Diamante™

CONTRACT | OUTDOOR | MARINE | AUTOMOTIVE




SPRADLING®
For the long run

Colour Palette

18 inspiring colours

PERMABLOK³
ADVANCED PROTECTION

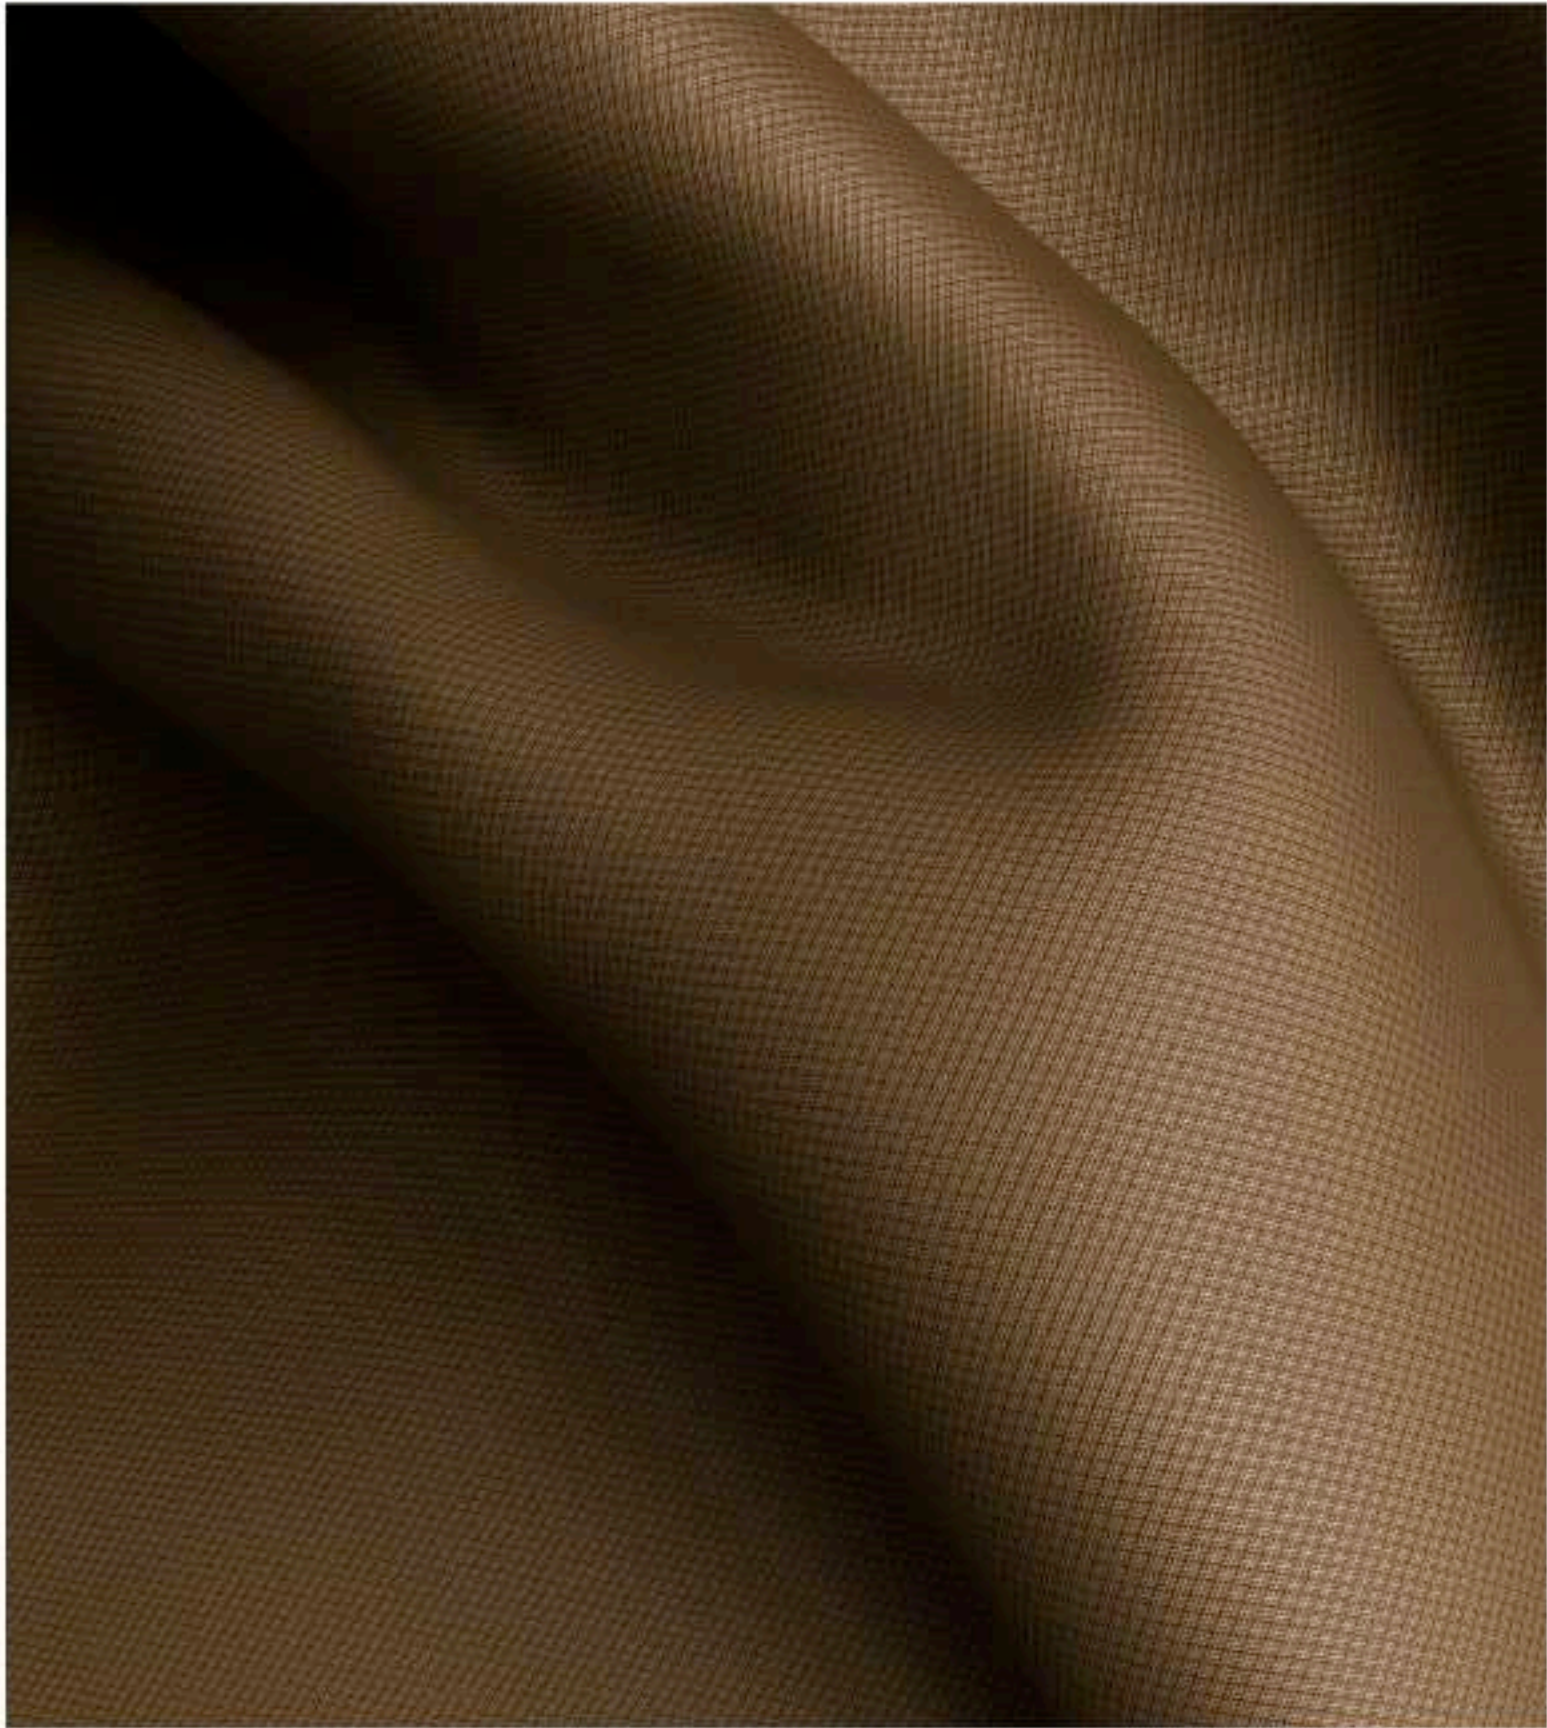

DIA-6613
ESPRESSO




DIA-6600
POLAR




DIA-6601
SNOW




DIA-6602
IVORY



DIA-6620
TAPIOCA



DIA-6613
ESPRESSO



DIA-6619
OTOÑO




DIA-6604
HONEY



DIA-6603
TAUPE




DIA-6621
TONIC



DIA-6622
MERCURY



DIA-6614
METEOR



DIA-6623
VINTAGE



DIA-6609
LAVA




DIA-6607
SUNSET




DIA-6611
REGATTA



DIA-6618
INDIGO



DIA-6624
PEPPER



DIA-6615
CARBON

Technical data sheet

Composition:	Topcoat: Vinyl
Backing:	Backing 100% Polyester
Weight:	680 gr/m²
Width:	min. 137cm
Roll size:	+/- 30m*
Abrasion:	> 100.000 cycles (MARTINDALE)
Cold Crack:	-23° C
UV-Resistance:	ISO 105 B02: ≥7/8 (Blue Wool Scale) ISO 105 B04: ≥4/5 (Grey Scale)

* Typical roll length. Length may vary depending on the availability of standard roll size

Flame Retardancy**:	EU EN 1021 Part I & 2	FR NF P 92-503 / M2
	EU ECE R 118.02 Anx. 6, 7 & 8	AT ÖNORM B 3825, Gruppe I
	EU IMO 2010FTP Part 8	AT ÖNORM A 3800 Teil I
	EU EN 71-2:2006+Al:2007 Safety of Toys - part2.	US FMVSS302
	DE DIN 4102 B2	US CAL TB 117-2013, Sec. E
	IT UNI 9175 Classe I.IM	US FAR 25/853

Other characteristics	EU (MED) Marine Equipment Directive
	UK UKCA

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behaviour of this or any other material under actual conditions.

FINISHES AND TREATMENTS

Virucidal Activity:	ISO 18184:2019 ¹ ISO 21702:2019 ²
Bacteriostatic Properties:	ISO 22196:2011. Value of antibacterial*** activity R>2.

*** Testing was conducted with material exposed to Staphylococcus aureus, Staphylococcus aureus (MRSA), Escherichia coli and Klebsiella pneumoniae.

WARRANTY 5 Years. Terms and Conditions apply.

PERMABLOK³® and SPRADLING®, are registered trademarks of Spradling Holdings, Inc®.


ABRASION
RESISTANT


IMPERMEABLE


UV RESISTANT


LOW
TEMPERATURE
RESISTANT


EASY TO CLEAN


MILDEW
RESISTANT


FLAME
RETARDANT


CHEMICAL
RESISTANT

SUSTAINABLE PRODUCT PROFILE

Heavy Metals Free



*In accordance with REACH, RoHs and ECHA regulations

- AZO = Azo dyes
- CFC = Chlorofluorocarbons
- HCFC = Hydrochlorofluorocarbons
- BPA = Bisphenol A
- PBTs = Persistent Bio accumulative and Toxic Chemicals
- PCP = Pentachlorinated Biphenyl
- PCB = Pentachlorinated Biphenyl
- PCT = Polychlorinated Terphenyls

Certifications



Sustainable manufacturing certifications



Compliances



Acknowledgments



SPRADLING®
For the long run

WWW.SPRADLING.EU